

Portable Diaphragm Hand Pump



Provides quick emptying of decontamination pools, holding and drainage tanks, wells, etc. Removes high volumes of fluids in minutes. No need for electricity or combustion engines. Engineered and configured for quick setup and deployment. May be used at virtually any location. Components comprised of durable non-reactive materials. Ideal for use with both hazardous and non-hazardous materials.

P-15 15GPM Diaphragm Hand Pump Kit (56.78 lpm)

Includes female 1½" Nyglas cam-loc inlet/outlet couplers and poly base mounting

- 10 ft. (3.05m) 1½" inlet hose with male Nyglas quick couplers & Nitrile strainer
- 20 ft. (6.09m) 1½" outlet hose with male Nyglas quick couplers attached
- 15" x 1½" x 4½" (38.10 x 3.81 x 11.43 cm), 5lbs/2.27kg with hose, 15.5lbs/7.03 kg, output 15 GPM



P-15



P-15OH



P-15IH

ANCILLARY EQUIPMENT

P15AF-1515F Fits male/male 1½" hose coupler (Cam-loc "D" couplers both ends)

P15AF-2X15 Barrel head adapter (2" threaded brass male barrel fitting with FM "D" cam-loc coupler for hose attachment)

P15AF-2X34 Barrel head adapter (2" threaded brass barrel fitting with ¾" FM GHT swivel connector)

P15AF-112 Pair male "A" coupler to ¾" male & FM GHT adapter for inlet & outlet of P-15 pump

P-15OH Replacement 1½" x 20' outlet hose (can also be used for extension)

P-15IH Replacement 1½" x 10' inlet hose with Nitrile strainer



P15AF-1515F




P15AF-2X15



P15AF-2X34



P15AF-112

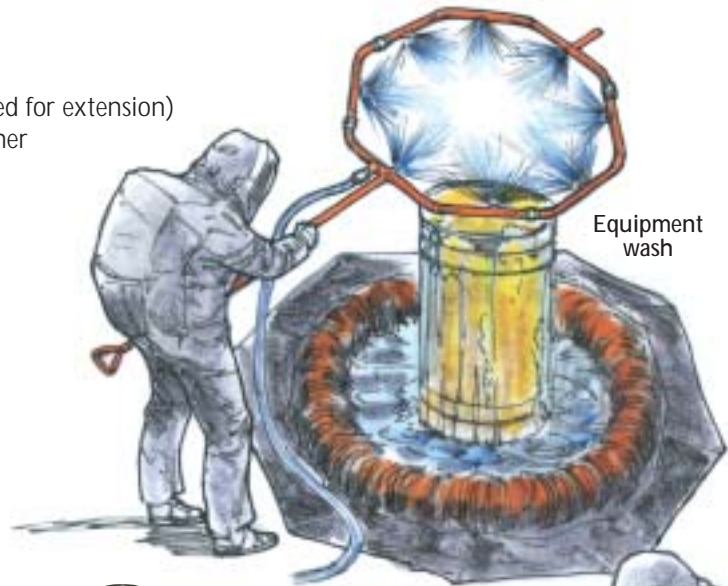

Equipment wash



Portable diaphragm hand pump